




VINYL FLOORING



► Vinyl Flooring Specification

Vinyl Flooring Thickness	4mm,5mm,6mm,8mm
Vinyl Flooring Dimension(mm)	1220*180mm, 1210*178mm, 935*150mm
Vinyl Flooring Wear Layer	0.3mm,0.4mm,0.5mm
Vinyl Flooring Under Layment	IXPE: 1mm,1.5mm,2mm
Vinyl Flooring Click	Unilin Click

► Vinyl Floor Size

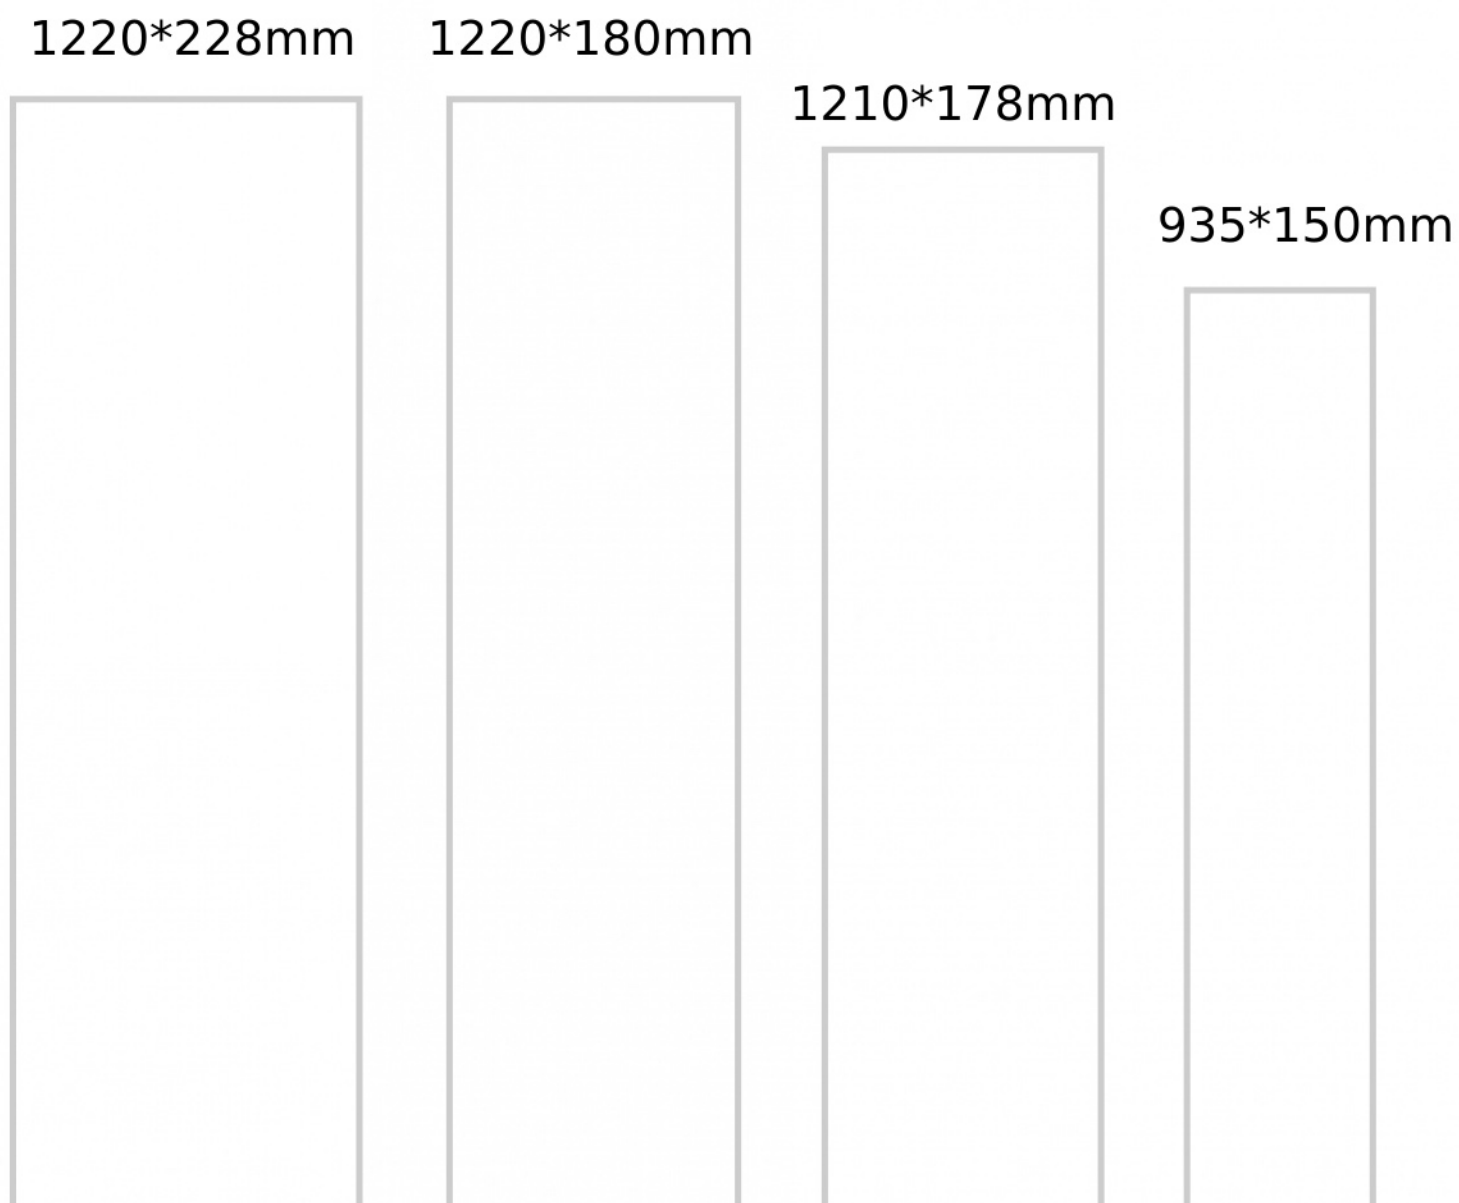



2115-6



5007



5008



202-9



YN407



202-7



2115-8



DB131



5003



5006



5001



DB105


▶ Colors of SPC Flooring



X-Large Plank(mm)



Multi-width planks (mm)

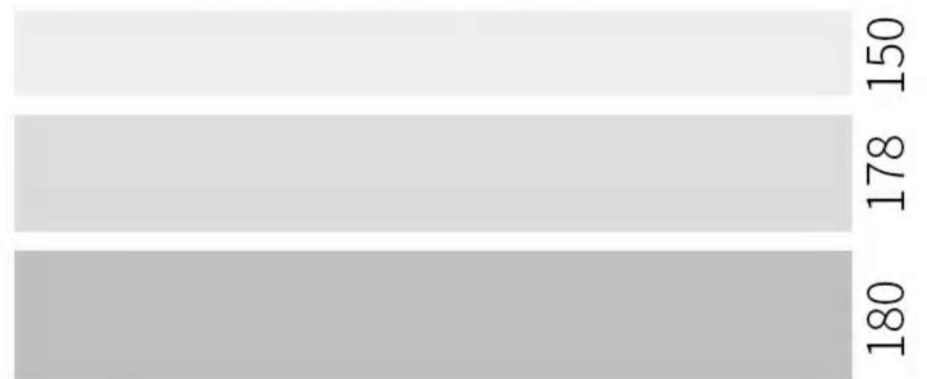



■ CK5003



Colors of SPC flooring




1218





■ 1002-5

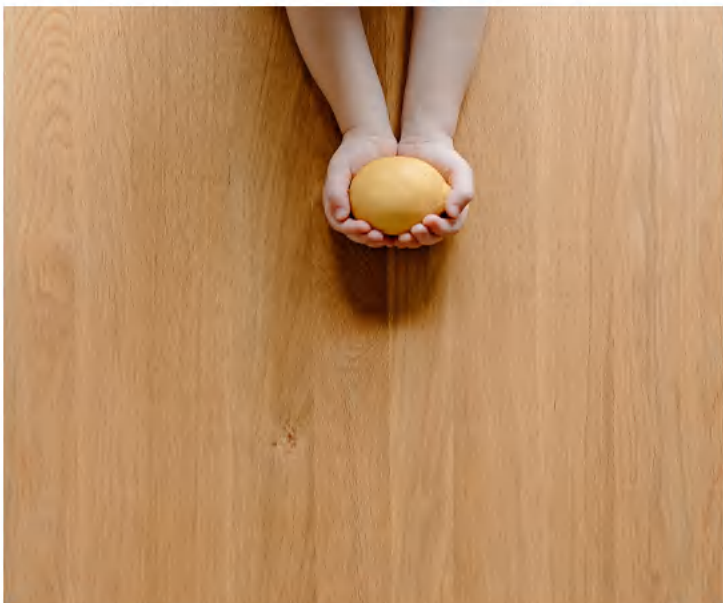



1169

Live with Color and Dream
with Creativity”





» 1052-8



» 1052-8

» YSD-1098-4



YSD-1098-4



➤ YSD-1148



YSD-1148








» 1172-2





1172-10

1269

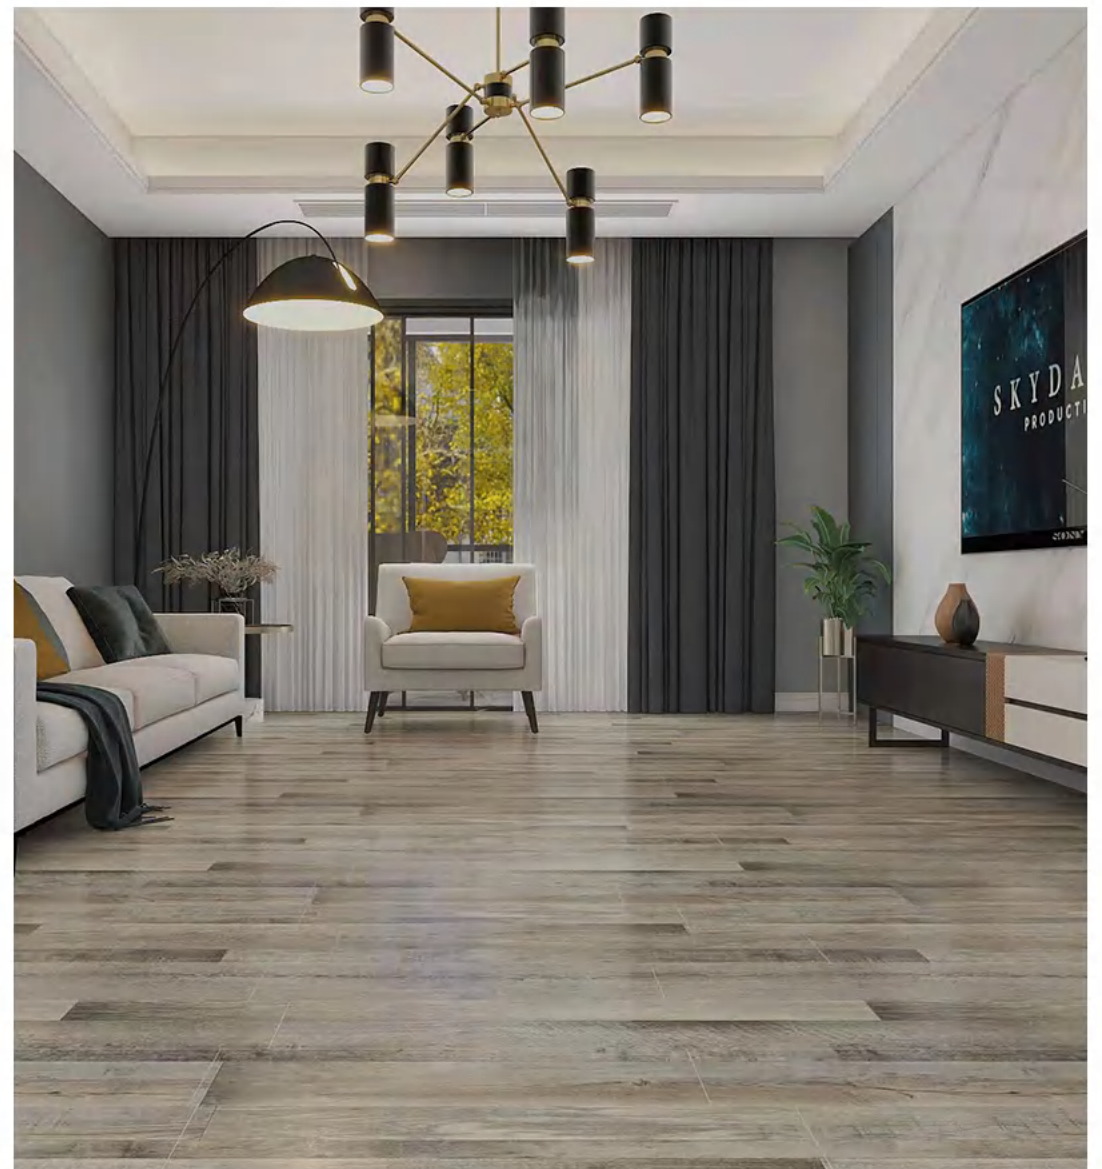



1172-14



1172-17



1172-17

LQ5124-14



LQ5183-7



66021-15



66041-6





66051-2

Colors of SPC flooring



▶ CK5001



▶ 1123-5



▶ 1001-4



▶ 202-9

Colors of SPC flooring




▶ CK5003



▶ 1085-6



▶ 1217

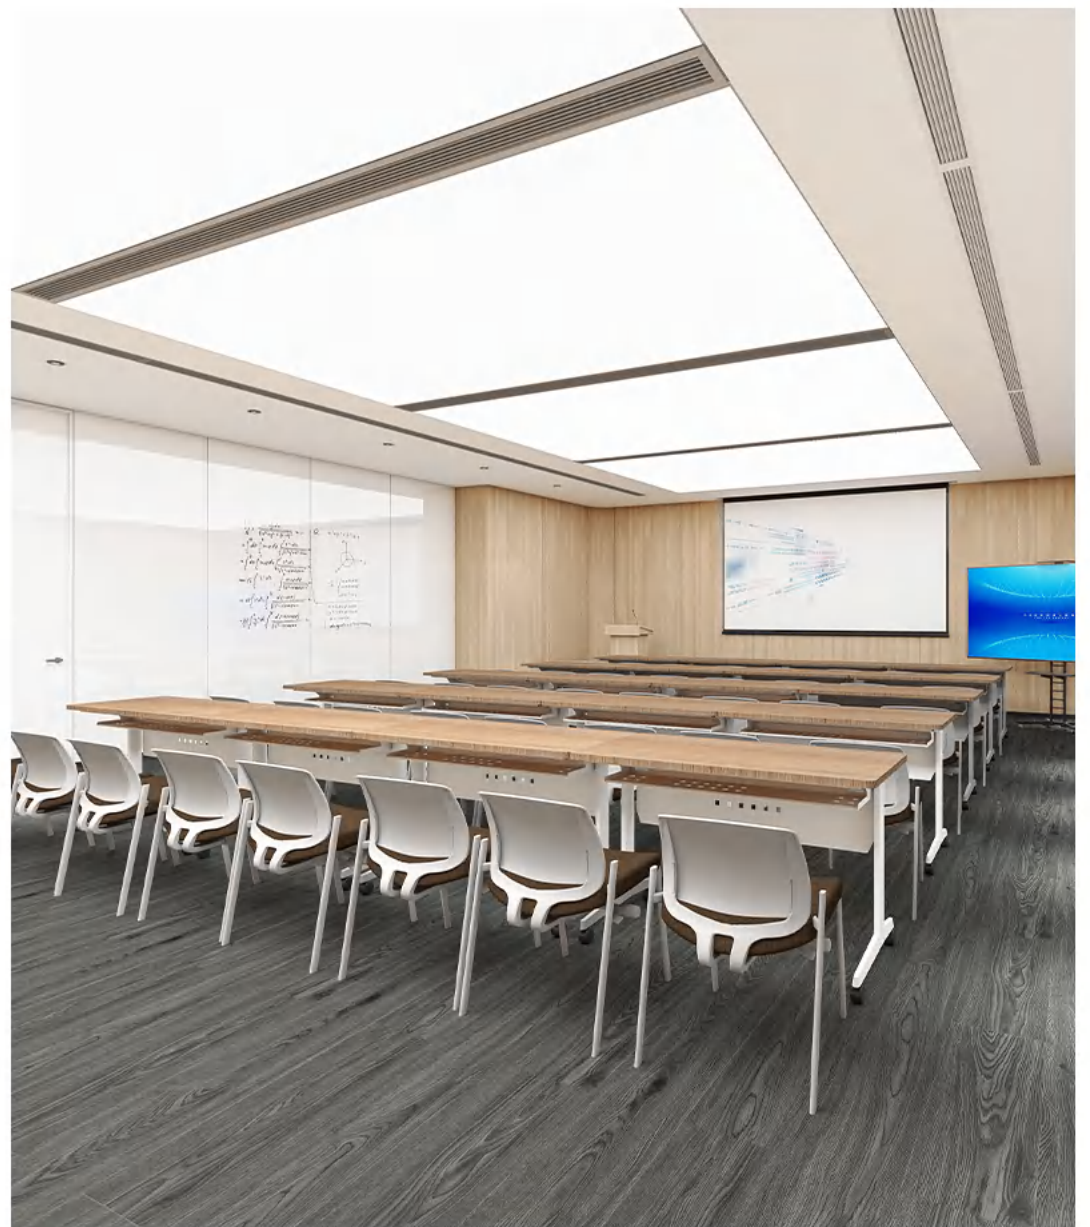

▶ 202-7

Colors of SPC flooring




▶ DB131



▶ YN407



▶ 2115-6

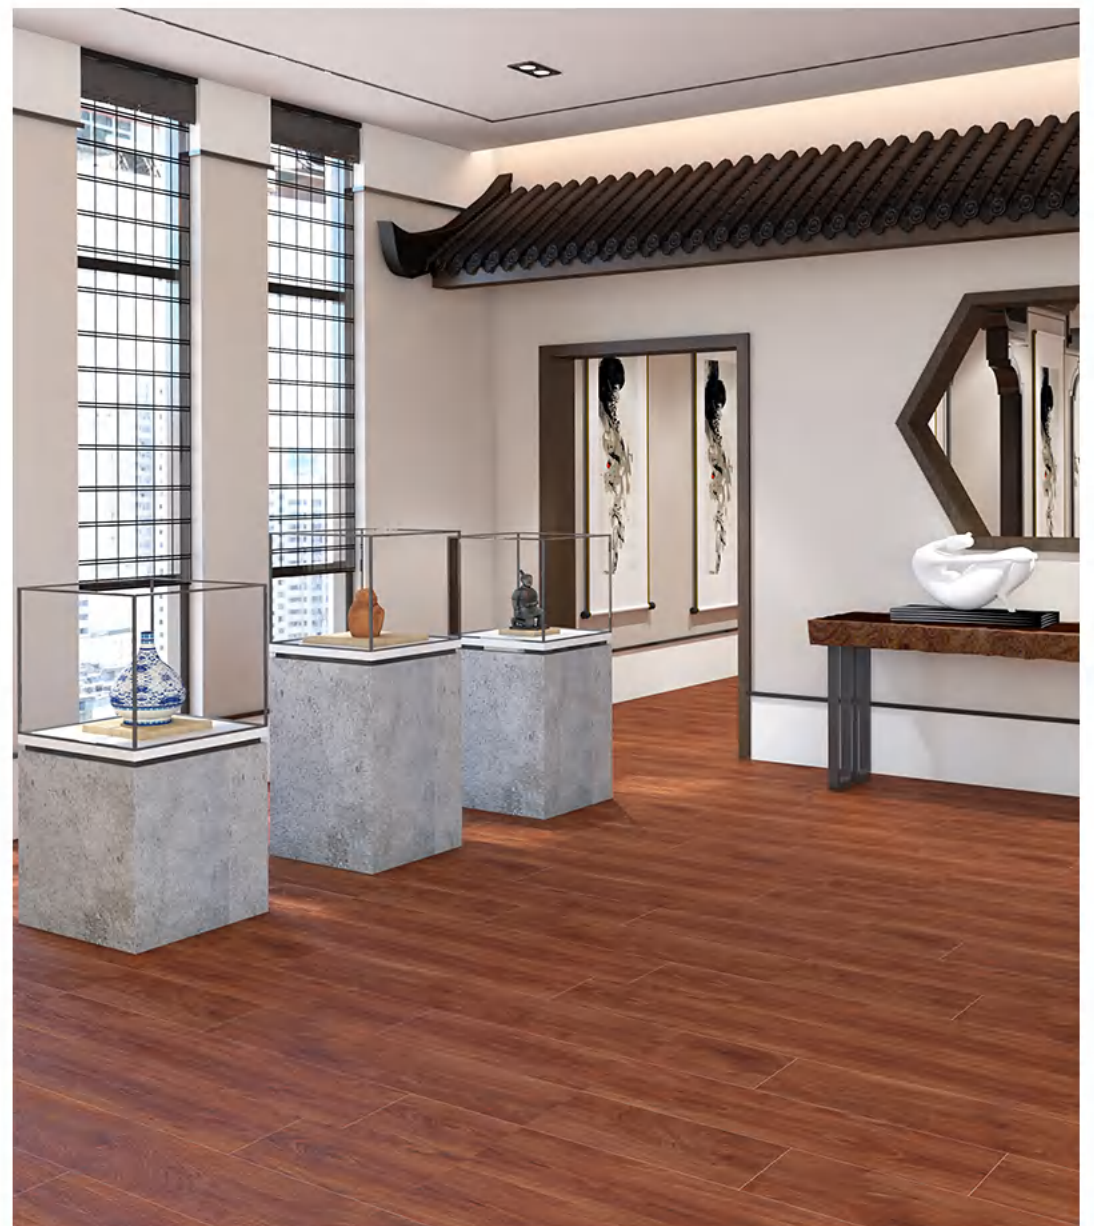

▶ 1216

Colors of SPC flooring



1002-13

1003-7

1006-1

1006-2

1073

1082-14

1082-19

1085-1



1085-2

1085-5

1095-1

1113-11

1121-1

1122

1123-5



Vinyl Flooring Technical Data

CHARACTERISTICS	STANDARDS			
	EN	Result	ASTM	Result
Size	EN 427	Pass	ASTM F536	Pass
Overall Thickness	EN 428	Pass	ASTM F36	Pass
Wear Layer Thickness	EN 429	Pass	ASTM F410	Pass
Dimension Squareness and Straightness	EN 427	Pass Squareness:0.18mm Straightness:0.07mm		
Chemical Resistance	EN 423	Pass	ASTM F925, ASTM F1344	Pass
Colour Fastness to Artificial Light	EN20105:B02 Method A	Pass, \geq Grade 6	ASTM F1515	Pass
Heat Stability by Color Change			ASTM F1514	Pass
Castor Chair Suitability	EN 425	Pass		
Residual Indentation	EN 433	Pass, 0.06mm	ASTM F1914, ASTM F970	Pass
Abrasion Group	EN 660-1/2	Group T	ASTM F510, ASTM D3384	Pass
Impact Resistance			ASTM F1265, ASTM D2632	Pass
Dimensional Stability	EN 434	Pass	ASTM F2199	Pass, 0.1%
Sound Reduction	ENIS0717-2(Δ Lw)	2 dB		
Flexibility	EN 435 Method A	Pass	ASTM F137	Pass
Slip Resistance	EN 13893	Class DS	ASTMD2047-93	Pass
Electrical Resistance	EN 1081 Method C	Pass	ASTM F150-06	Pass
Thermal Resistance	EN 12664	Pass		
Toxic Element Test	EN 71-3	Pass. Not toxic. Does not contain heavy metal and formaldehyde		
Behaviour to Fire	ENIS011925-2 EN13501-1 EN ISO 9239-1	Bf1-S1	ASTM E648-06	Pass/Class1
Smoke Density			ASTM E662	Pass, <450